


AEM10300

Quick Start Guide EVK

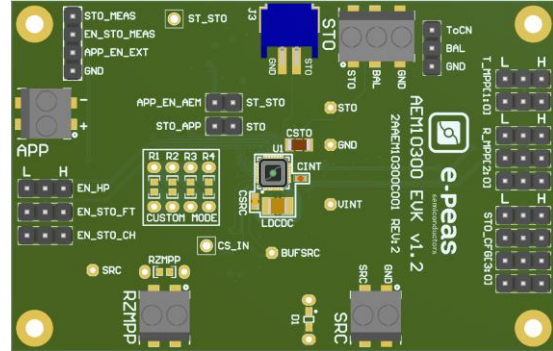

FEATURES

Connectors

- 1 screw connector for the source.
- 1 screw connector + 1 JST connector for the storage element.
- 1 screw connector for the application circuit.
- 1 screw connector for RZMPP.

Configuration

- 3 headers R_MPP[2:0] to configure the source MPP ratio.
- 2 headers T_MPP[1:0] to configure the source MPP timings.
- 4 headers STO_CFG[3:0] to configure the storage element protection levels.
- 4 resistor footprints, R1 to R4, related to the custom mode (STO_CFG[3:0]=LHHH).
- 1 header to set the dual-cell supercapacitor BAL feature.
- 3 headers to configure the different modes.
- 2 headers to enable the application output supply.

Size

- 76mm x 49mm.
- 4 x M2.5 mounting holes.

SUPPORT PCB

BOM around the AEM10300

Designator	Description	Quantity	Manufacturer	Part Number
U1	AEM10300 - Symbol QFN 28-pin	1	e-peas	order at sales@e-peas.com
L _{DCDC}	Power inductor 10 μ H - 1.76A	1	Murata	DFE252010F-100M
C _{INT}	Ceramic Cap 10 μ F, 6.3V, 20%, X5R 0402	1	Murata	GRM155R60J106ME15
C _{SRC}	Ceramic Cap 22 μ F, 10V, 20%, X5R 0603	1	Murata	GRM188R61A226ME15D
C _{STO} (optional)	Ceramic Cap 150 μ F, 6.3V, 20%, X5R 1206	1	Murata	GRM31CR60J157ME11L

Footprint & Symbol: Information available in the datasheet.





STEP 1: Configure the AEM10300



- **Source voltage regulation:** R_MPP[2:0] and T_MPP[1:0]


Configuration pins			MPPT ratio
R_MPP[2:0]			V_{MPP} / V_{OC}
L	L	L	60%
L	L	H	65%
L	H	L	70%
L	H	H	75%
H	L	L	80%
H	L	H	85%
H	H	L	90%
H	H	H	ZMPP

Configuration pins		MPPT timing	
T_MPP[1:0]		Sampling duration	Sampling period
L	L	5.19 ms	280 ms
L	H	70.8 ms	4.5 s
H	L	280 ms	17.9 s
H	H	1.12 s	71.7 s

- **Storage element voltages protection:** STO_CFG[3:0]

Configuration pins				Storage element threshold voltages			Typical use
STO_CFG[3:0]				V_{OVDIS}	V_{CHRDY}	V_{OVCH}	
L	L	L	L	3.00 V	3.50 V	4.05 V	LiCoO ₂ battery, Li-Po battery, Lithium Titanate (3.8 V) battery (long life).
L	L	L	H	2.80 V	3.10 V	3.60 V	LiFePO ₄ battery, Lithium capacitor (LiC).
L	L	H	L	1.85 V	2.40 V	2.70 V	Dual-cell NiMH battery, Lithium-Titanate (2.4V) battery.
L	L	H	H	0.20 V	1.00 V	4.65 V	Dual-cell supercapacitor.
L	H	L	L	0.20 V	1.00 V	2.60 V	Single-cell supercapacitor.
L	H	L	H	1.00 V	1.20 V	2.95 V	Single-cell supercapacitor.
L	H	H	L	1.85 V	2.30 V	2.60 V	Lithium-Titanate battery (2.4V).
L	H	H	H	Custom Mode (single-cell NiMH battery, LiC, etc.)			
H	L	L	L	1.10 V	1.25 V	1.50 V	Ni-Cd single-cell battery.
H	L	L	H	2.20 V	2.50 V	3.00 V	Ni-Cd dual-cell battery.
H	L	H	L	1.45 V	2.00 V	4.65 V	Dual-cell supercapacitor.
H	L	H	H	1.00 V	1.20 V	2.60 V	Single-cell supercapacitor.
H	H	L	L	2.00 V	2.30 V	2.60 V	Solid State battery.
H	H	L	H	3.00 V	3.50 V	4.35 V	LiCoO ₂ battery, Li-Po battery, Lithium Titanate (3.8 V) battery.
H	H	H	L	2.60 V	2.70 V	4.00 V	Tadiran TLI.
H	H	H	H	2.60 V	3.50 V	3.90 V	Tadiran HLC.

- **BAL option:** Select “ToCn” to use the balancing or “GND” to disable it.
- **Configuration mode:** Jumper to H to enable or to L to disable the features:
 - EN_HP: High power mode enabling.
 - EN_STO_FT: Source to storage element feed-through enabling.
 - EN_STO_CH: Storage element charge enabling.
- **External output supply:** Place both jumpers connecting STO_APP to STO and APP_EN_AEM to ST_STO to enable the APP output supply.

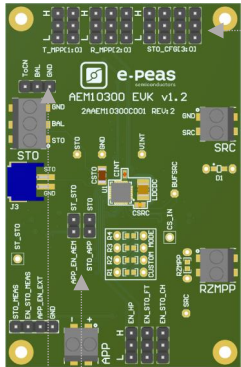




STEP 2: Connect the storage element


STEP 3: Connect the harvester



Internal boost efficiency Vs. input voltage in Low Power mode:

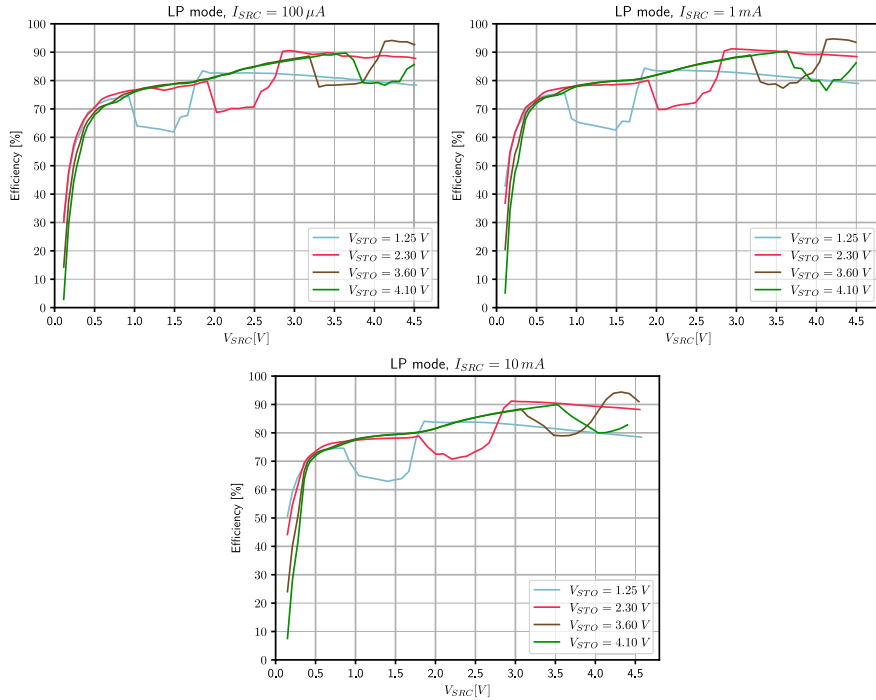

Internal boost efficiency Vs. input voltage in High Power mode:

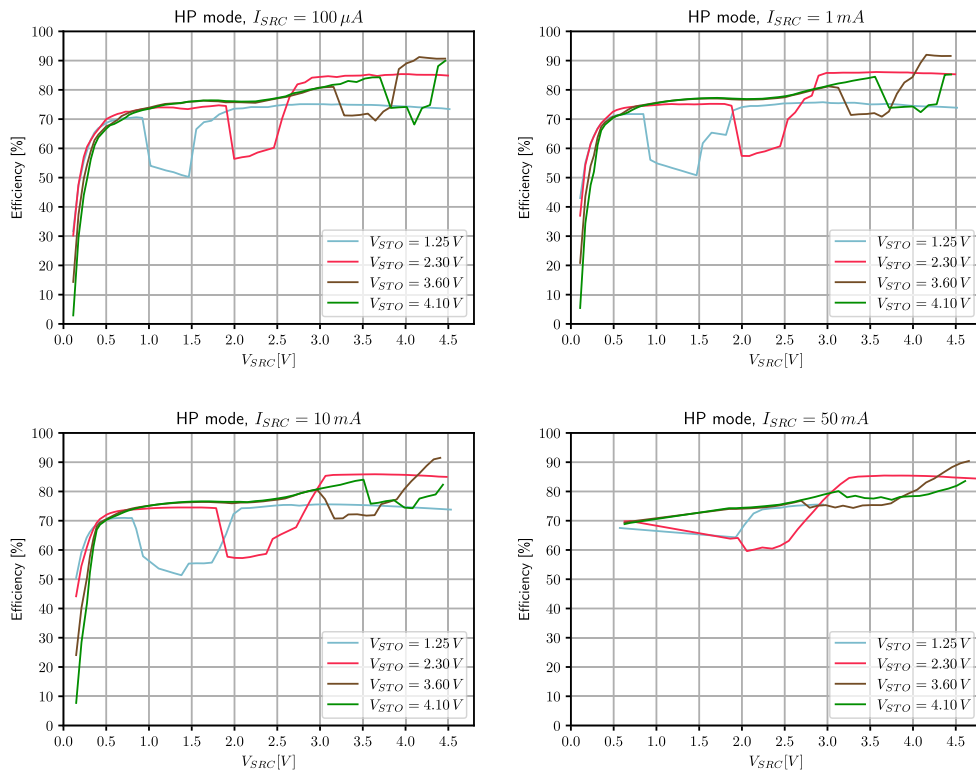

STEP 4: Check the status

Status Pins				
ST_STO	26	Logic Output	HIGH: V_{STO}	HIGH when the storage device voltage V_{STO} rises above V_{CHRDY} threshold. LOW when V_{STO} drops below the V_{QVDIS} threshold.

